




Git remote

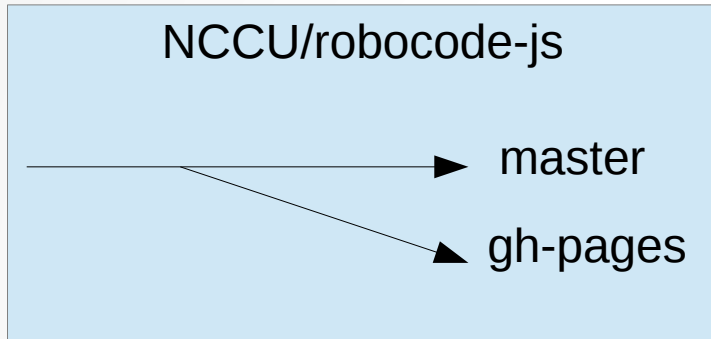


Git remote

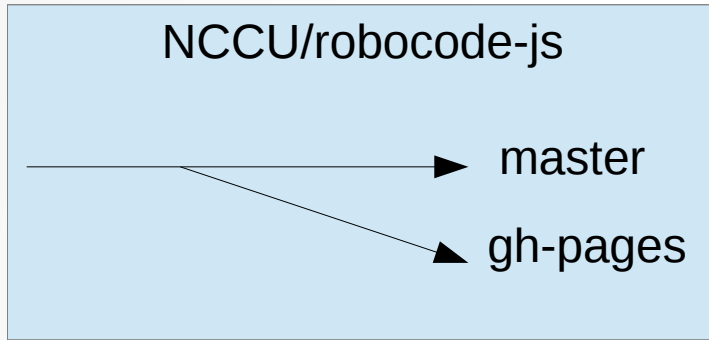


fork

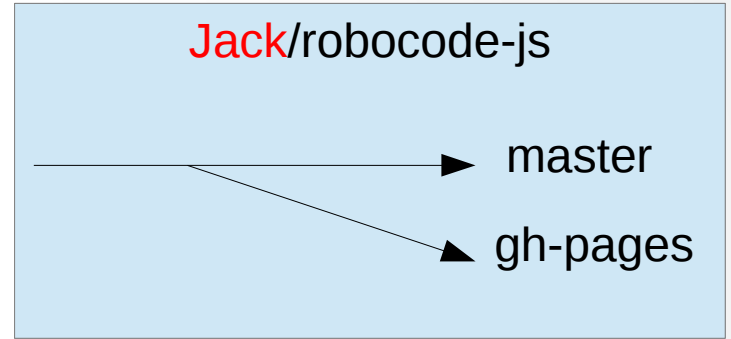


Git remote

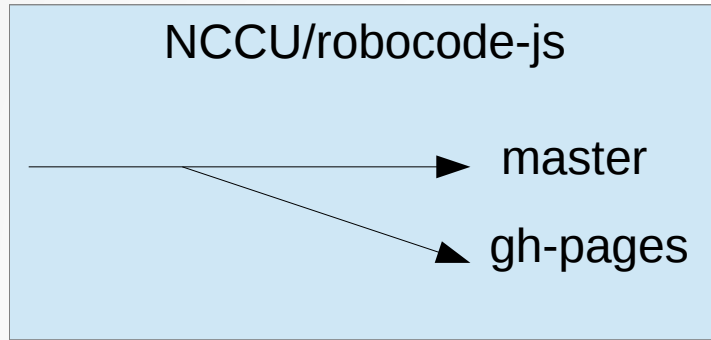


fork

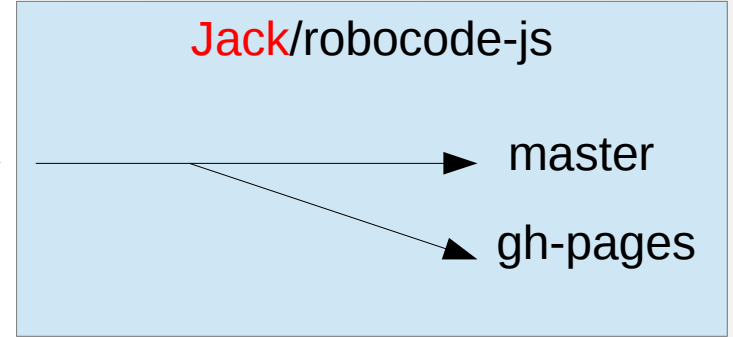


git clone

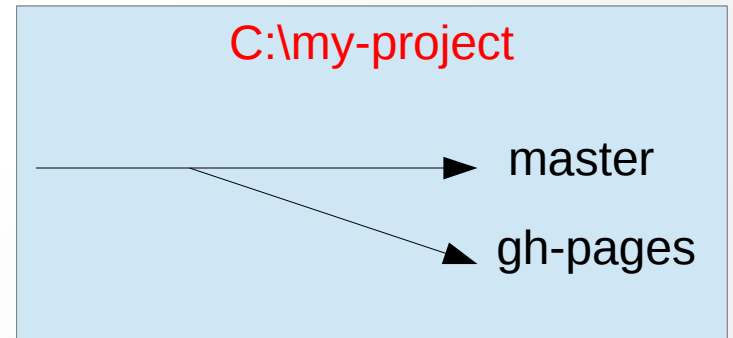


Git remote

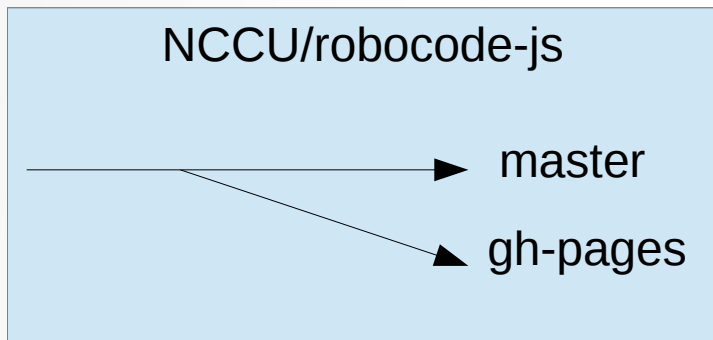

fork

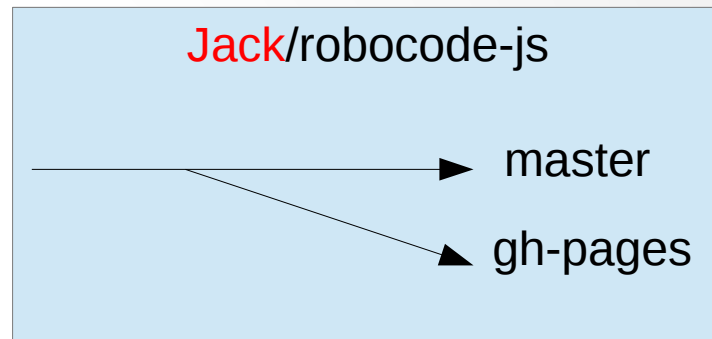


git clone

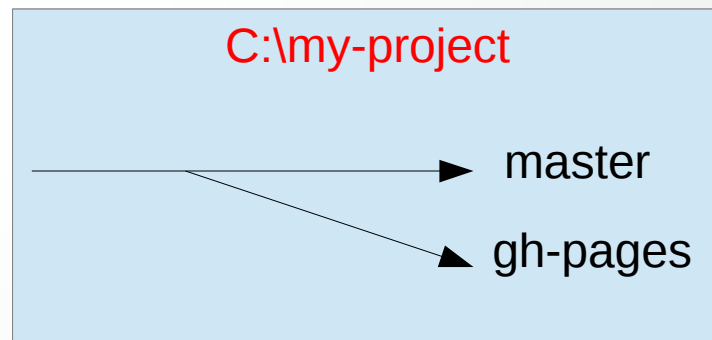


origin = git://github.com/**Jack**/rebocode-js


Git remote

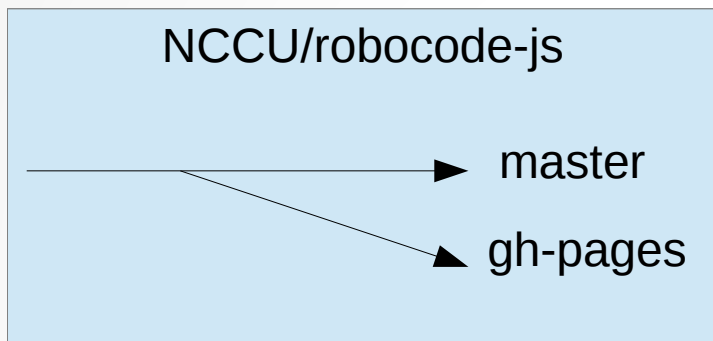

fork

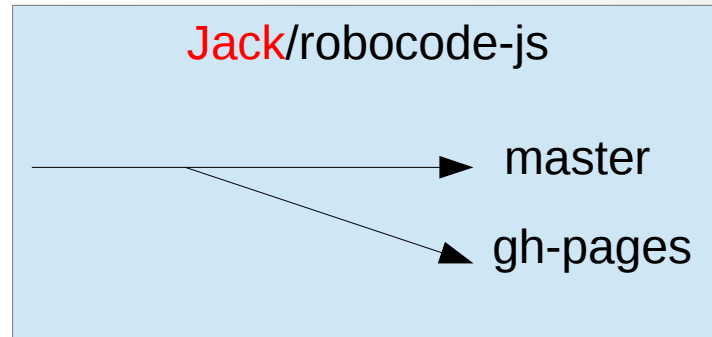


git clone

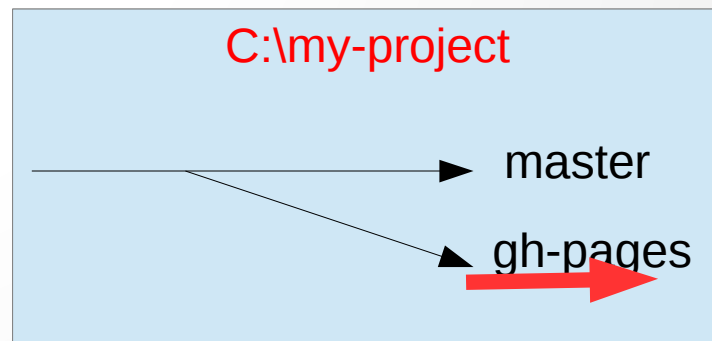


origin = git://github.com/Jack/rebocode-js

Git remote

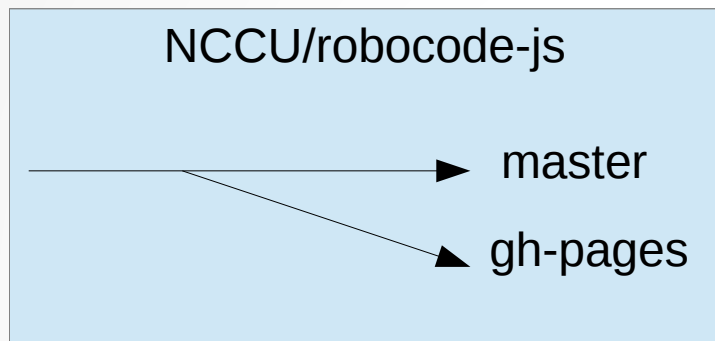


fork

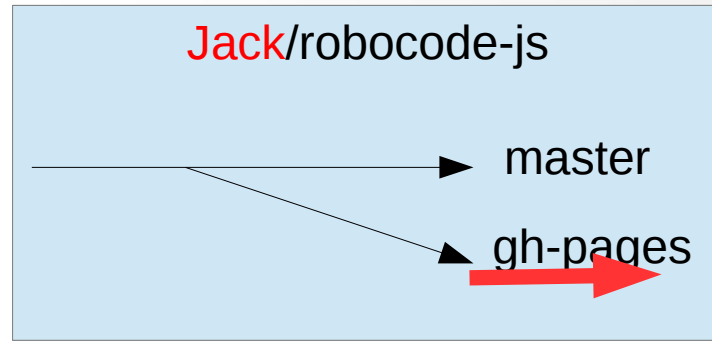

git push **origin** gh-pages:gh-pages





git clone

C:\my-project

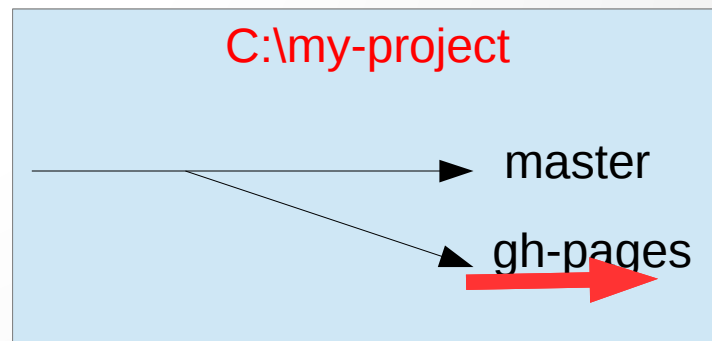




origin = git://github.com/**Jack**/robocode-js

Git remote

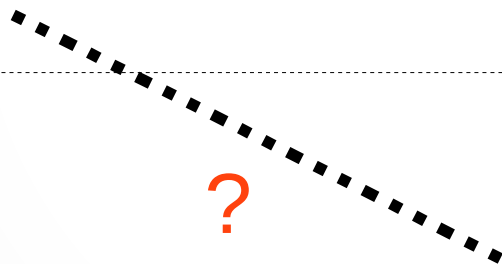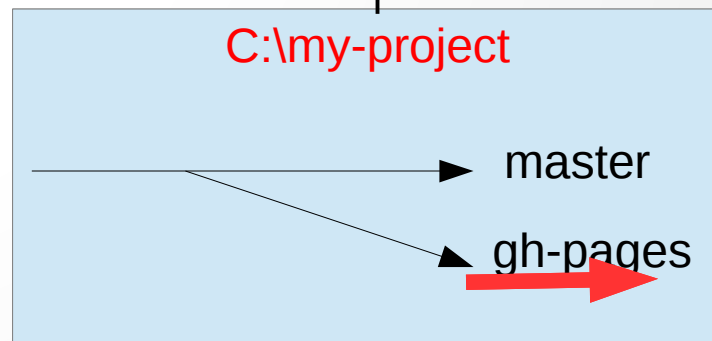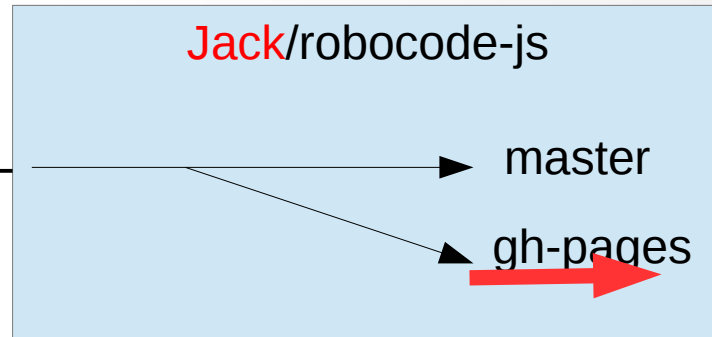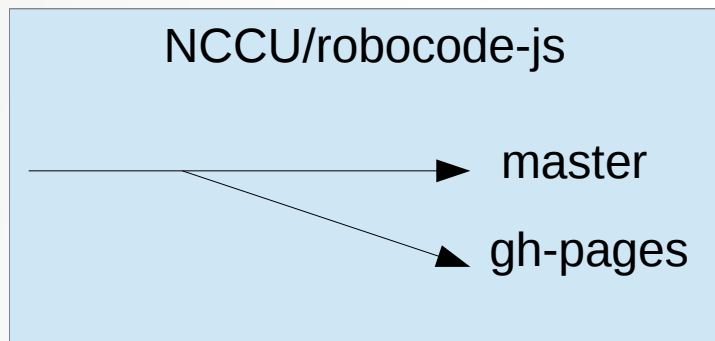

origin = git://github.com/Jack/rebocode-js



Git remote

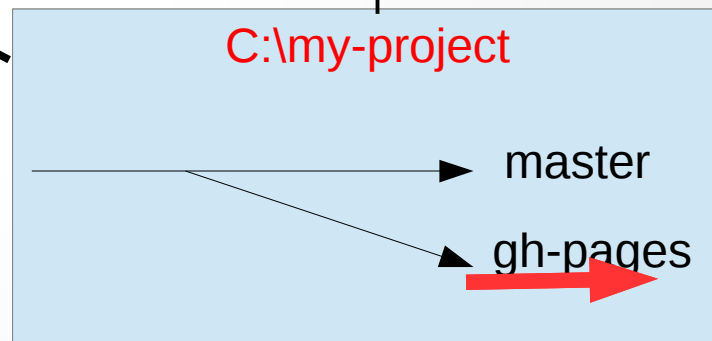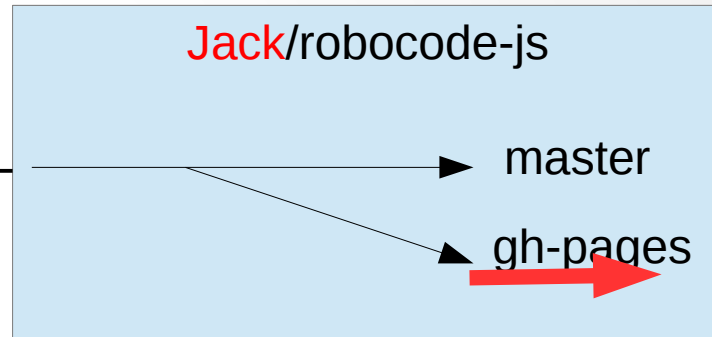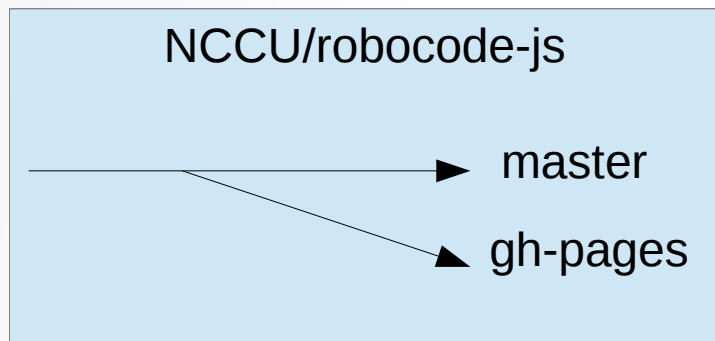

foo = git://github.com/NCCU/rebocode-js

origin = git://github.com/Jack/rebocode-js


Git remote

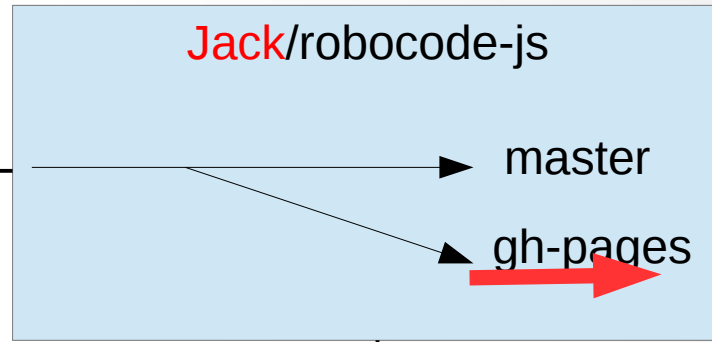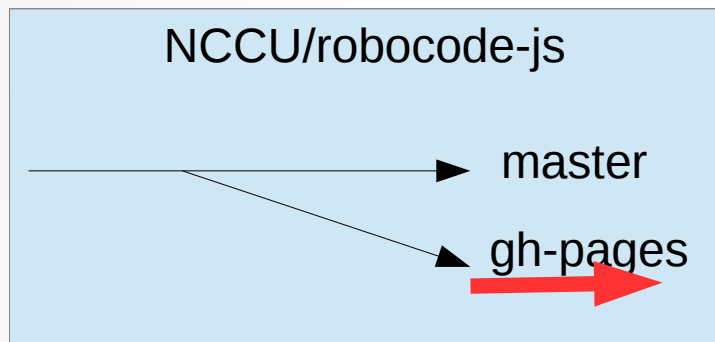

git push **foo** gh-pages:gh-pages

foo = git://github.com/NCCU/rebocode-js

origin = git://github.com/Jack/rebocode-js

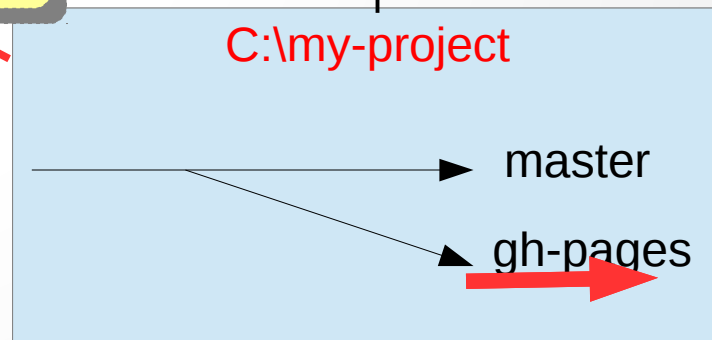

Git remote

C:\my-project\.git\config

```
[remote "origin"]  
  url = git@github.com:Jack/robocode-js.git  
[remote "foo"]  
  url = git@github.com:NCCU/robocode-js.git
```

foo = git://github.com/NCCU/rebocode-js

origin = git://github.com/Jack/rebocode-js